

H60100




IP40

240V



*Cyanosis compliant on request

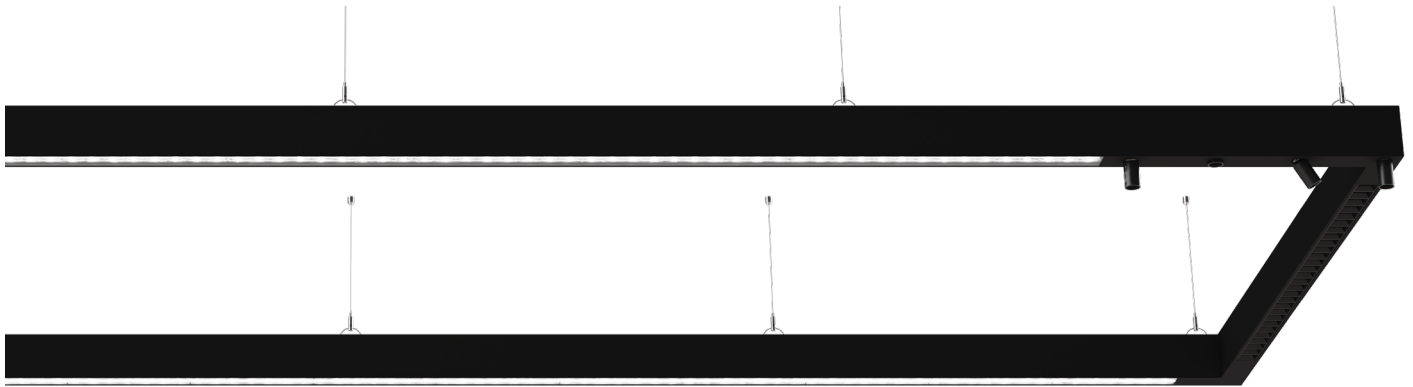


Key Features


- Complies with relevant Australian Standards
- Screwless end caps (On Request)
- Emergency Options available (On Request)
- Provided shop drawings
- Welded joints (On Request)
- Plug and play
- Australian manufactured
- IP55 (Only On Diffused Optics On Request)

Dimensions

Profile




Colour Options



Mounting

Surface Mounted (S) Wire Pendant (P) Up/Down Wire (U) Recessed Trimless (T) Wall Up & Down Mounted (C) Wall Mounted (W)

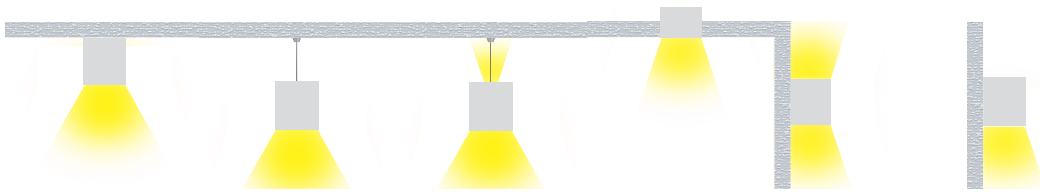

Code

Example: **H60100- S129030ODDO10 - 2400**

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length								
H60100	S	Surface Mounted	12	12 W/m	1008 lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX
	T	Trimless Recessed	16	16 W/m	1344 lm/m	90	CRI>90	35	3500K	Lx	Linear Lens##	DA	DALI	11	White	
Optional	W	Wal Mounted	20	20 W/m	1680 lm/m			40	4000K	Bx	Black Louvered##	SW	Switch-Dim	75	Grey	
	C	Wall Up/Down	24	24 W/m	2016 lm/m			50	5000K	Wx	White Louvered##	CA	Casambi	79	Anodised	
H60100IP	P	Pendant (Wire)	28	28 W/m	2352 lm/m			TW	Tunable White	TR	Tack	T2	Tunable White	CU	Custom	
	D	Pendant (Rod)	32	32 W/m	2688 lm/m					MS	Mini Spot					
	U	Pendant Up/Down (Wire)	36	36 W/m	3024 lm/m											
		40	40 W/m	3360 lm/m												
	Y	Pendant Up/Down (Rod)	44	44 W/m	3696 lm/m											
		48	48 W/m	4032 lm/m												

FOS Lighting reserve the right to change any data without notification

##Codes identified on the second page of the data sheet

Optics

Louvers



B8 - Black Wide 80°
B5 - Black Medium 50°
B3 - Black Narrow 35°
B0 - Black Oval 25 + 70°
BA - Black Asymmetric
W8 - White Wide 80°
W5 - White Medium 50°
W3 - White Narrow 35°
W0 - White Oval 25 + 70°
WA - White Asymmetric

Linear Lenses



L1 - Glare Control Lens 110°
L9 - Glare Control Lens 90°
L6 - Glare Control Lens 60°
L3 - Glare Control Lens 30°
LO - Glare Control Lens 30° + 60° Oval
LA - Glare Control Lens Asymmetric
LD - Glare Control Lens Double Asymmetric
LW - Glare Control Lens Wall Grazing

Opal Diffusers



OD - Opal Diffuser
CD - Clear High Impact Diffuser (IK06)
HD - High Impact Opal Diffuser (IK06)

Track



TR - Track

Mini Spots



MS - Mini Spot